

THERMAL MASS FLOW RED-Y

WWW.THERMALMASSFLOW.COM

SPECIFICATIONS

Automatic or manual – our thermal mass controllers feature high precision for the regulation of gas flow rates. When used for automatic regulation, the optimized interaction of the measuring unit and the regulating valve permits complex regulation tasks to be implemented efficiently and reliably.



CMOS SENSOR TECHNOLOGY

By using high-precision CMOS technology (semiconductor sensors) our thermal measurement and control devices are setting new standards in response behavior and measurement accuracy, and feature a previously unknown dynamic measurement range.

VERSATILE APPLICATION

The principle by which thermal mass measurement operates is ideally suited to the measurement of gas flow rates. One of its key advantages is that the measurement is largely independent of pressure and temperature. Unlike volumetric methods, it is not necessary to take an additional, separate measurement of the pressure and temperature.

FEATURES

- * High dynamic range (up to 1:500)
- * Very high measurement precision
- * Fast regulation
- * Extended functions thanks to digital communication
- * Simple operation
- * Compact, modular construction
- * Easy maintaining and servicing

APPLICATIONS

- * Coating plant (equipment construction)
- * Regulation of gaseous atmospheres (biotechnology)
- * Analytical equipment
- * Local preparation of a gas mixtures

GAS FLOW MEASURING SOFTWARE

With the free software 'get red-y', the thermal mass flow meters and flow controllers of the red-y smart series easily communicate with your computer:

With a mouse click, you define the function parameters, record measuring data and optimize your application in just a few steps!

WHAT 'GET RED-Y' HAS TO OFFER:

- Reading the actual values (flow-through, temperature)
- Reference value default
- Adjusting the control parameters
- Changing gases
- Graphic display of actual value, set point, valve tension
- Recording of measuring data via a logging functions
- Totalizer
- Scanning the bus structure
- Changing the device addresses
- Serial interface RS-232
- Runs on all computers with Windows NT/2000/XP

WWW.THERMALMASSFLOW.COM

Komodo Enterprises, Inc. DBA
Thermal Mass Flow
2620 S. Maryland Pkwy
Suite 14, Box 863
Las Vegas, NV 89109

California Office
8915 Research Dr.
Irvine CA, 92618

Tel: 949.341.0314
Fax: 949.341.0315

E-mail: info@thermalmassflow.com



*Tough, Durable,
Rugged, Reliable,
Stout Construction*


Visit all our web sites:
WWW.DUSTMONKEY.NET
WWW.DUCTMONKEY.NET
WWW.MONKEYARMS.COM



*Experts in Mass Flow
Control.*

WWW.THERMALMASSFLOW.COM

DIAGRAM

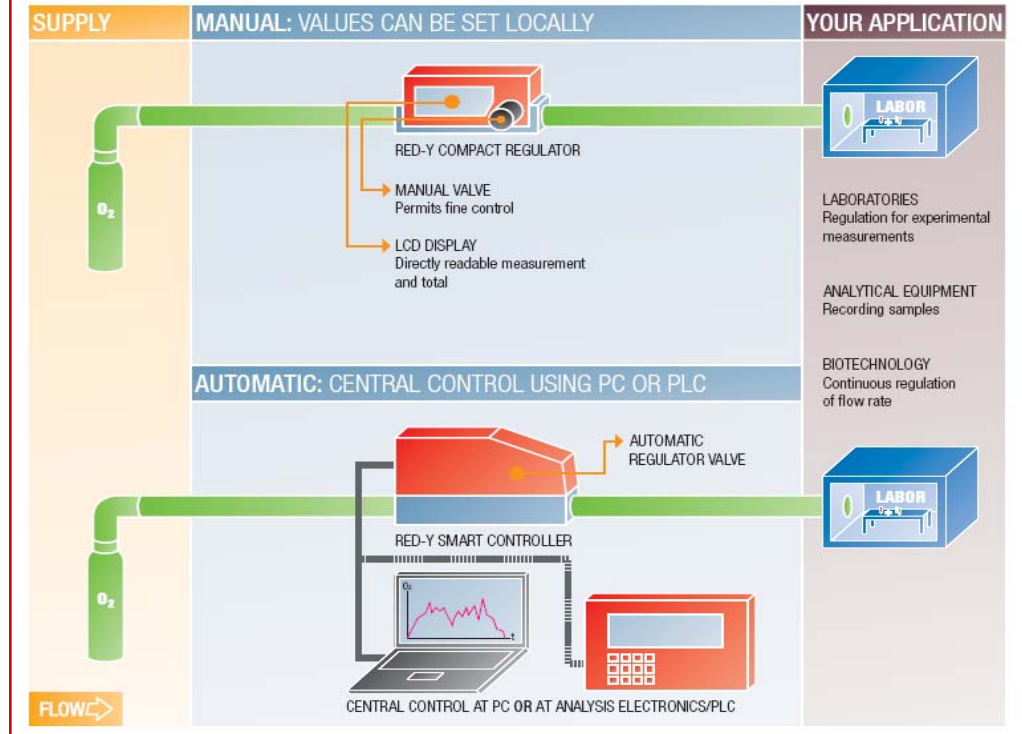

TERMS AND CONDITIONS

PAYMENTS AND TERMS

Prices quoted are good for 30 days unless otherwise noted. Thermal Mass Flow accepts cash, check, wire transfer, or credit cards. All prices are quote in US Dollars, unless otherwise noted. All sales are final. All freight is FOB, Las Vegas, Nevada unless otherwise noted. All goods remain the property of Thermal Mass Flow until paid in full. Payment is due at time of order unless credit has been granted. All past due accounts accrue a service fee of 3% per month. Thermal Mass Flow is a DBA of Komodo Enterprises, Inc., a Nevada Corporation.

PRIVACY STATEMENT

Komodo Enterprises Inc. respects your privacy and will not divulge your contact information to any third party organization or entity without your express permission. In addition, our web sites gather no unauthorized information from your computer during your visit with us. All phone calls to Dust Monkey may be monitored or recorded.

ACCURACY

Thermal Mass Flow assumes no responsibility for errors or omissions in this web site or documents which are referenced by or linked to this site. This site could include technical or other inaccuracies. Changes are periodically added to the information, and Thermal Mass Flow may change the products or services described at any time. [Contact Customer Service](#) for further information before relying on any information contained herein. The information provided on this site, including text, images, and links, are provided "AS IS" by Thermal Mass Flow solely as a convenience to its visitors. This information is without any warranties, express or implied, including but not limited to warranties of merchantability, fitness for a particular purpose or non-infringement.

WARRANTY & INDEMNITY

Thermal Mass Flow warrants products it manufactures for a period of 90 days to the original purchaser from the date of purchase. Items not manufactured by Thermal Mass Flow are limited to their own manufacturer's warranties. This warranty does not apply to defects due directly or indirectly to misuse, negligence, accidents, abuse, repairs, or alterations or lack of maintenance. This is Thermal Mass Flow's sole written warranty and any and all warranties that may be implied by law, including any merchantability or fitness, for any particular purpose, are hereby limited to the duration of this written warranty. Thermal Mass Flow does not warrant or represent that the merchandise complies with the provisions of any law or acts. In no event shall Thermal Mass Flow liability under this warranty exceed the purchase price paid for the product. Both parties agree to binding arbitration in Las Vegas, Nevada. Thermal Mass Flow shall in no event be liable for death, injuries to persons or property or for incidental, and contingent, special, or consequential damages arising from the use of our products. Thermal Mass Flow warrants products only for the specific use expressly agreed to at time of purchase by Thermal Mass Flow in writing. Motors should only be started and stopped up to 4 - 10 times per hour. Starting motors more frequently can cause heat build up and can cause the motor overload to trip or cause motor damage. In general, motors should be started and stopped as little as possible for maximum lifespan and best economy (electrical use). *Note: Motors should be protected from extreme weather to prolong motor life. All claims, including claims covered under the limited warranty, are subject to inspection and investigation before Buyer's claim is settled. Any parts returned for warranty or repair will not be accepted without an RMA number and must be shipped pre-paid. Contact Customer Service with the original bill of sale to obtain an RMA number.